

A technical diagram of a 12-pin DIN connector. It shows a rectangular housing with a 2x6 grid of circular pin sockets. Each socket contains a pin with a central longitudinal slot. The housing has mounting tabs on the left and right sides, each with a circular hole. A horizontal bar is attached to the top of the housing, featuring six circular mounting points.

☐ ☐

[illegible]

[illegible][illegible][illegible]


□ □




[illegible]




SyncMaster400Dxn/ 460Dxn

[illegible][illegible][illegible][illegible][illegible][illegible][illegible]


[illegible]

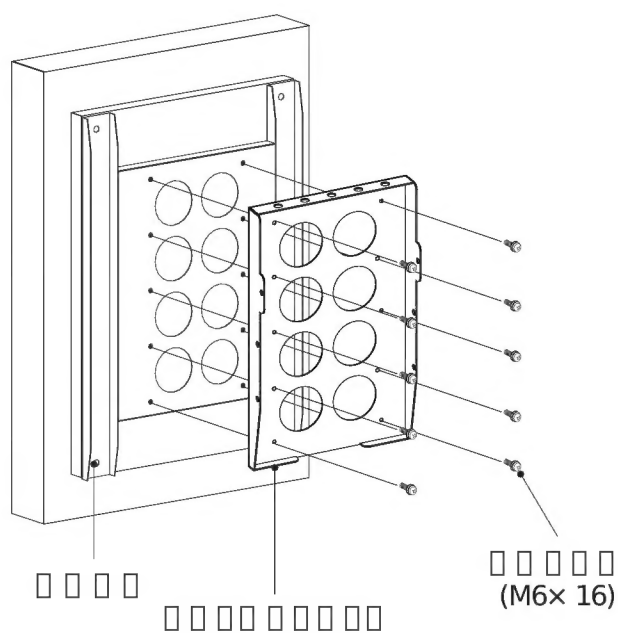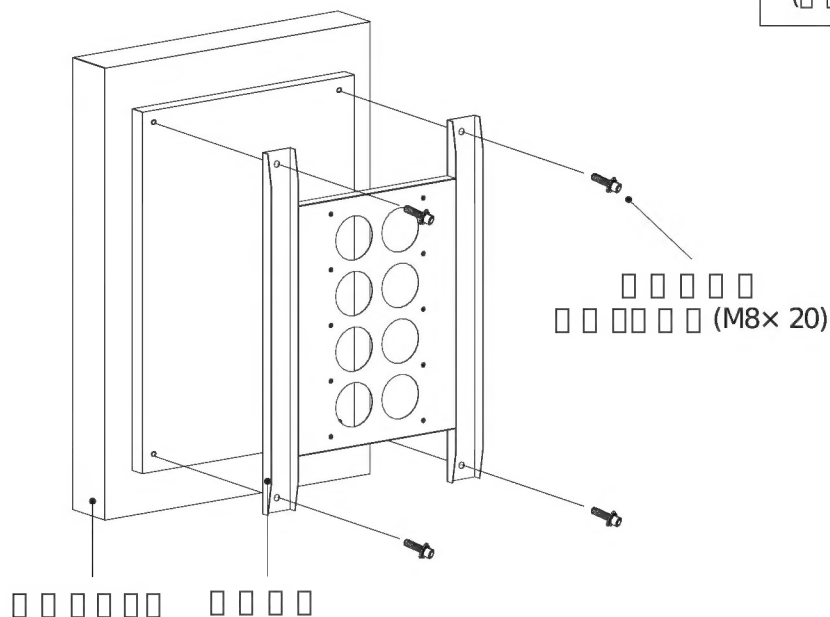

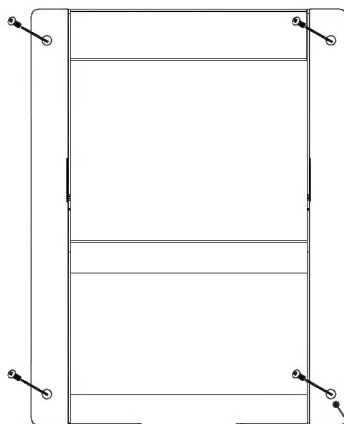


□ □ □ □ □ □ □ φ 12□

[illegible]

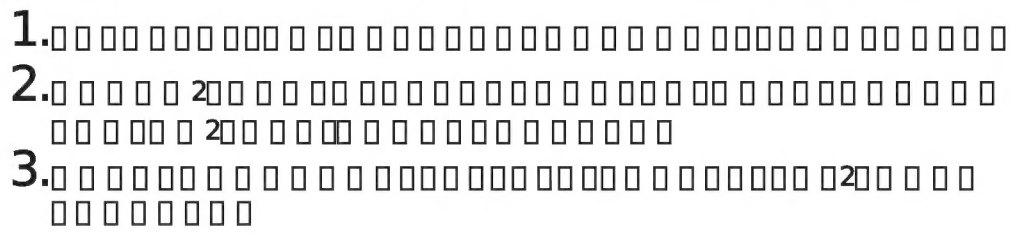


3.







3. 000 000 000 0 0 0000 00 000 0 0 000


1.

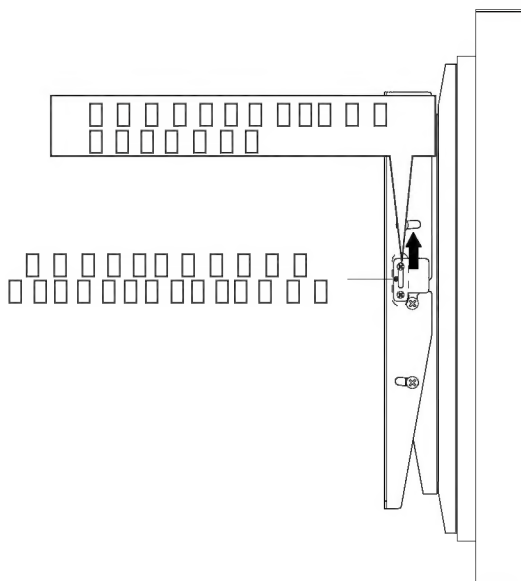

2.

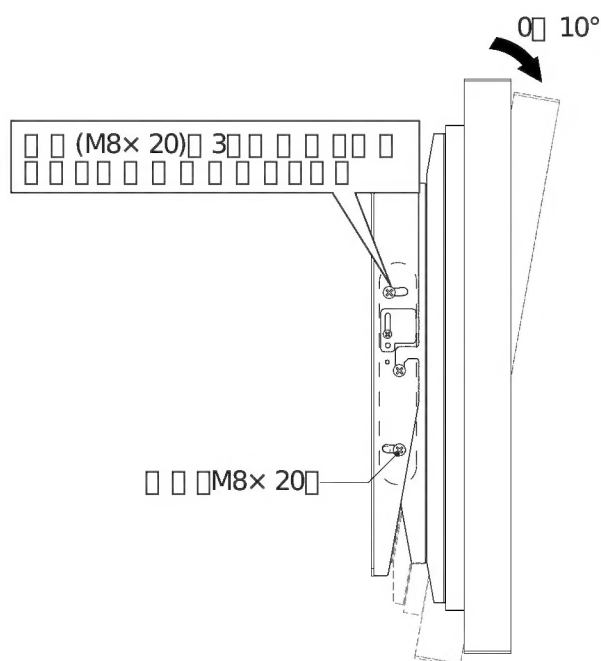

3.

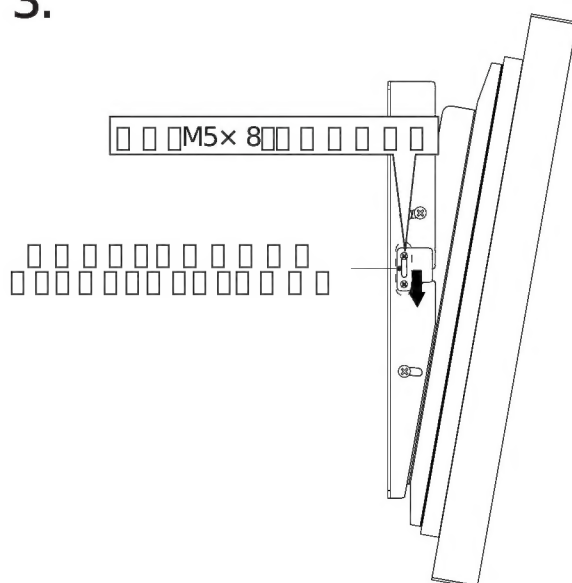

☐ 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20
☐ 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20
 01 02 03 04 05 06 07 08 09 10 11

The diagram illustrates the hierarchical structure of a 1D lattice with 16 sites. The lattice is represented by a horizontal chain of 16 squares. Above the chain, there are four levels of grouping: the first level groups pairs of sites into 8 pairs, the second level groups pairs of pairs into 4 groups of 4, the third level groups groups of 4 into 2 groups of 8, and the fourth level groups the entire chain into 1 group of 16. Each level is indicated by a vertical line connecting the relevant sites, and each group is labeled with a number (1, 2, 4, 8, 16) in a circle.

- 9 -